











Jungle Series

R32 DC Inverter Air Source Heat Pumps with SPRSUN Self-developed Controller

- 
 Multiple Modes for Comfortable Use
- 
 ERP A+++ Performance
- 
 Stable Running Ambient
- 
 Touch Screen Controller
- 
 Reduced Noise
- 
 WIFI Control
- 
 KEYMARK Certification
- 
 SG Ready



MULTIPLE FUNCTION FIVE WORKING MODES

Central Hot Water

Central Hot Water: Constant Temperature, Sufficient Water Volume, 24-hour Instant Supply.

Central Cooling

Water Cooled Air Conditioning, Soft Air Supply, Comfortable for Human Body.

Whole House Heating

Water Cycled Floor Heating, Well-distributed Heat Dissipation, Healthy & Energy Saving.

Hot Water + House Cooling

Meet the Requirements of Both Central Hot Water and Air Conditioning.

Hot Water + House Heating

Meet the Requirements of Both Central Hot Water and Room Heating.





R32 refrigerant

R32 refrigerant is an environmentally friendly refrigerant with low global warming potential and ozone depletion potential. Using R32 refrigerant in heat pump systems can improve operational performance and efficiency, reduce energy consumption and carbon emissions, and become a key element of sustainable development. Combined with the intelligent control system developed by sprsun and excellent product design, the advantages of R32 refrigerant are fully utilized to contribute to sustainable development.



High Heating Efficiency

The unit can operate at high frequency to heat water at a faster speed. When the temperature reaches the set temperature, it will operate at a low frequency with less energy consumed to maintain temperature.




Product Service



Intelligent Defrosting




SPRSUN independently developed its own PID intelligent defrosting control mode. When the defrosting conditions are met, the defrosting mode will be automatically entered to prevent the unit from defrosting confusion and energy consumption, which will improve the reliability and economy of the whole unit.

 Stable Running
Ambient -30° C






48dB
Sound Pressure (1m)

-  20dB-Rustle of Leaves
-  30dB-Whisper
-  70dB-Car





* This data is from laboratory environmental testing.



SPRSUN Smart Control System

Working Principle

SPRSUN's self-developed smart control system is equipped with highly integrated control functions, which can be operated via a remote APP. The system is easy to manipulate, stable in performance, and is truly a smart operating system that realizes man-machine separation.

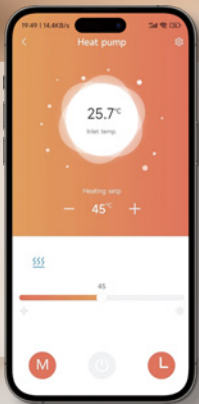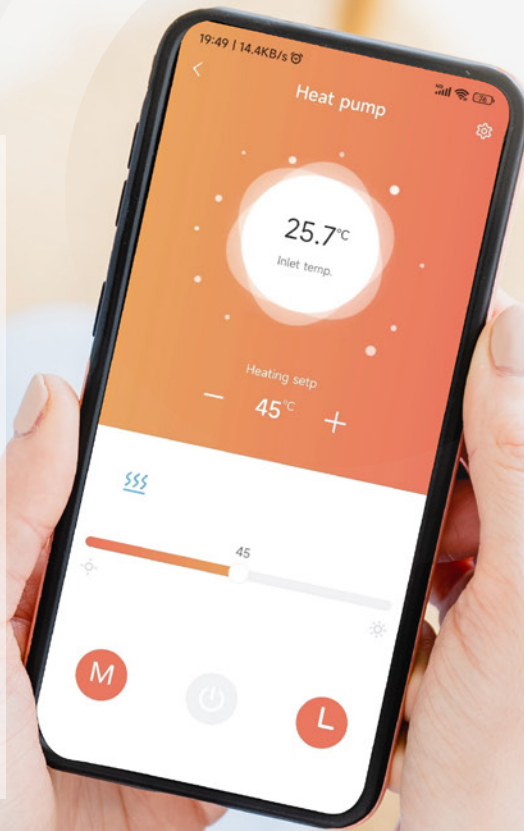


Router



Data Transfer



Web Platform



Heating in Low Temperature

Regulate heating and cooling using DC inverter compressors and DC inverter controllers; SPRSUN DC inverter heat pumps can operate at high frequency to heat water faster. When the temperature reaches the set temperature, it will operate at a low frequency with less energy consumed to maintain the temperature.



Key Components

We believe that by joining hands and working together, we will be able to create greater value for our customers. We cooperate with leading companies such as Panasonic, Grundfos, Copeland, MITSUBISHI, Schneider and SANYO to ensure upgraded product quality.



Controller
Touch screen Controller



Expansion valve
Fujikoki/Danfoss Electronic
Expansion Valve



Compressor
Panasonic Rotary Compressor



Condenser
Plate Heat Exchanger




4-way valve
SANHUA



Installation Diagram

Notice:

1. Please select the right modes according to your demand, then install it according to the installation diagram. If only hot water function is required, please select heating+hot water mode and then put the hot water sensor into the hot water tank.
2. Two-way valve and BV valve are optional for installation. Only if you need to control the temperature in different zones, please install both.
3. Fan coil can be controlled by linkage with the secondary circulation pump. Meanwhile, a passive linkage thermostat shall be installed.

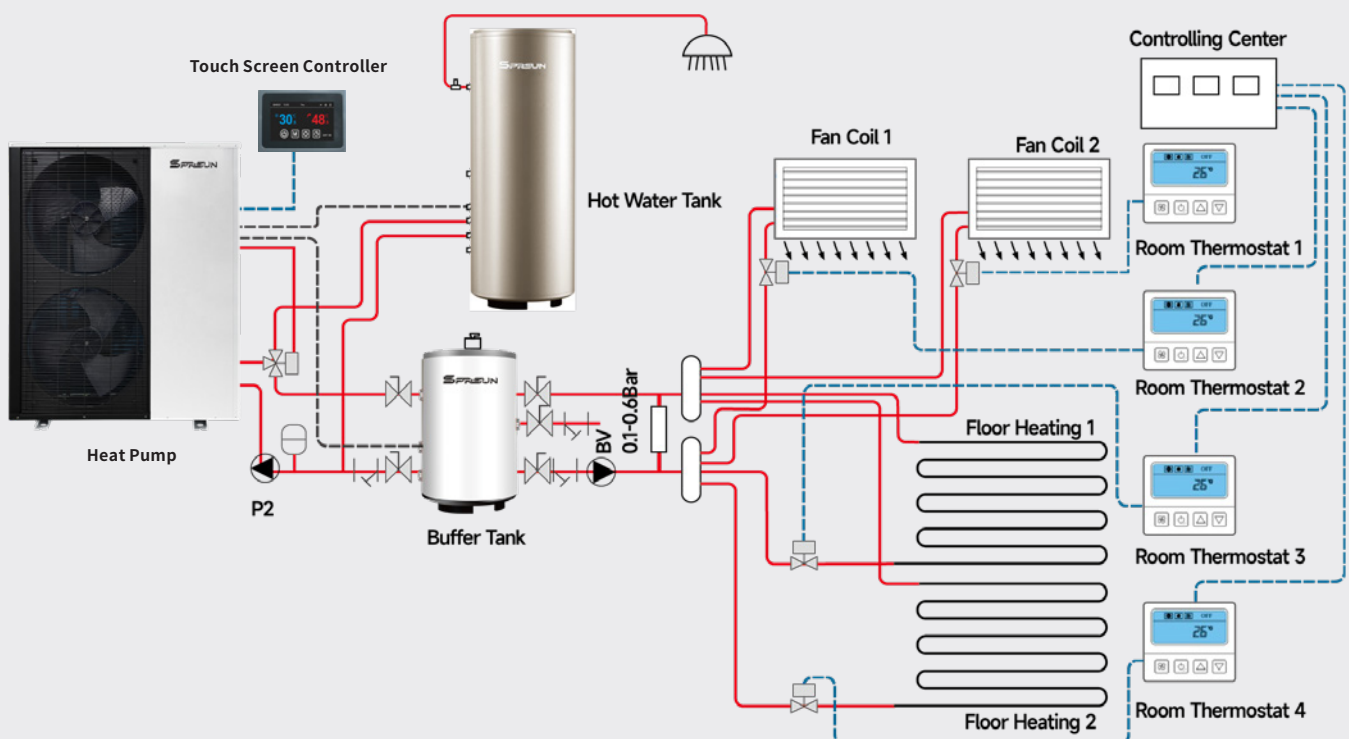

Specifications (220V)




Model		CGK015V3L-B	CGK025V3L-B	CGK030V3L-B	CGK040V3L-B	CGK050V3L-B	CGK060V3L-B
Power Supply	V/Hz/Ph	220-240/50/1					
Heating condition: water inlet/outlet temperature: 30°C /35°C , Ambient temperature: DB 7°C /WB 6°C ;							
Max. Heating Capacity	kW	6	9.4	11.6	15.8	19.8	21.8
C.O.P	W/W	4.45	4.56	4.41	4.61	4.71	4.61
Heating Capacity Min./Max.	kW	2.76/6	4.32/9.4	5.34/11.6	7.27/15.8	9.11/19.8	10.03/21.8
Heating Power Input Min./Max.	W	564/1348	759/2061	968/2630	1261/3427	1547/4204	1740/4729
C.O.P Min./Max.	W/W	4.45/4.9	4.56/5.7	4.41/5.51	4.61/5.76	4.71/5.89	4.61/5.76
Heating condition: water inlet/outlet temperature: 40°C /45°C , Ambient temperature: DB 7°C /WB 6°C ;							
Max. Heating Capacity	kW	5.8	9	11.1	15.2	19	20.9
C.O.P	W/W	3.56	3.65	3.53	3.69	3.77	3.69
Heating Capacity Min./Max.	kW	2.65/5.76	4.15/9.02	5.12/11.14	6.98/15.17	8.74/19.01	9.63/20.93
Heating power input Min./Max.	W	677/1618	958/2474	1223/3156	1593/4113	1954/5045	2198/5675
C.O.P Min./Max.	W/W	3.56/3.92	3.65/4.33	3.53/4.19	3.69/4.38	3.77/4.47	3.69/4.38
Cooling condition: water inlet/outlet temperature: 23°C /18°C , Ambient temperature: DB35°C /WB24°C ;							
Max. Cooling Capacity	kW	5.5	8.6	10.6	14.4	18.1	19.9
E.E.R	W/W	3.45	3.54	3.42	3.58	3.65	3.58
Cooling Capacity Min./Max.	kW	2.52/5.47	3.94/8.57	4.87/10.58	6.63/14.41	8.31/18.06	9.15/19.88
Cooling Power Input Min./Max.	W	656/1852	929/2423	1185/3091	1544/4028	1894/4941	2131/5558
E.E.R Min./Max.	W/W	2.95/3.84	3.54/4.25	3.42/4.11	3.58/4.29	3.65/4.39	3.58/4.29
Cooling condition: water inlet/outlet temperature: 12°C /7°C , Ambient temperature: DB35°C /WB24°C ;							
Max. Cooling Capacity	kW	4.3	6	7.5	10.2	12.7	14
E.E.R	W/W	2.59	2.48	2.4	2.5	2.56	2.5
Cooling Capacity Min./Max.	kW	1.99/4.32	2.78/6.05	3.43/7.46	4.67/10.16	5.86/12.74	6.45/14.02
Cooling Power Input Min./Max.	W	575/1720	744/2441	950/3115	1238/4058	1518/4978	1708/5599
E.E.R Min./Max.	W/W	2.51/3.45	2.48/3.74	2.4/3.61	2.5/3.78	2.56/3.86	2.5/3.78
Max Power Input	kW	2.02	3.09	3.95	5.14	6.31	7.09
Max Current	A	9.68	14.79	18.88	24.6	30.17	33.94
Sound Pressure (1m)	dB(A)	48	48	51	53	54	56
Sound power Level	dB(A)	62	63	66	67	69	71
Refrigerant	/	R32					
ErP Level(35° C)	/	A+++					
Cabinet Type	/	Galvanized steel painting					
Net Dimension(L×D×H)	mm	990*375*655	1110*475*810	1110*475*810	1110*475*960	1110*475*1355	1110*475*1355
Packing Dimension(L×D×H)	mm	1100*460*725	1165*490*960	1165*490*960	1165*490*1100	1165*490*1520	1165*490*1520
Net Weight	kg	59	78	88	105	124	124
Gross Weight (Cardboard case)	kg	70	101	105	120	150	150

All technical data is compliant with the guidelines specified in the following standards: EN14511; EN14825:2022; EN12102-1:2022; EN14511-3:2022; EN14511-4:2022 Clause4; (EU) NO. 813:2013; OJ 2014/ C207/02:2014. The SCOP seasonal heating efficiency is determined for temperate climate conditions. The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications. For updated product information, please visit <https://sprsunheatpump.com/>.



Specifications (380V)

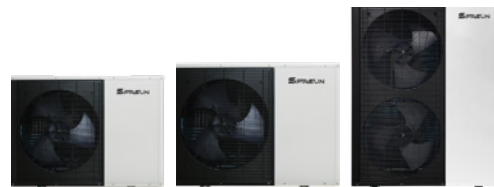

Model		CGK-025V3L-B	CGK-030V3L-B	CGK-040V3L-B	CGK-050V3L-B	CGK-060V3L-B	CGK-080V3L-B
Power Supply / Refrigerant	V/Hz/Ph	380-420/50/3 - R32					
Heating condition: water inlet/outlet temperature: 30°C /35°C , Ambient temperature: DB 7°C /WB 6°C ;							
Max. Heating Capacity	kW	9.4	11.6	15.8	19.8	21.8	28
C.O.P	W/W	4.56	4.42	4.62	4.72	4.62	4.62
Heating Capacity Min./Max.	kW	4.32/9.4	5.34/11.6	7.27/15.8	9.11/19.8	10.03/21.8	12.88/28
Heating Power Input Min./Max.	W	759/2061	966/2624	1259/3420	1544/4195	1736/4719	2230/6061
C.O.P Min./Max.	W/W	4.56/5.7	4.42/5.53	4.62/5.78	4.72/5.9	4.62/5.78	4.62/5.78
Heating condition: water inlet/outlet temperature: 40°C /45°C , Ambient temperature: DB 7°C /WB 6°C ;							
Max. Heating Capacity	kW	9	11.1	15.2	19	20.9	26.9
C.O.P	W/W	3.65	3.54	3.7	3.78	3.7	3.7
Heating Capacity Min./Max.	kW	4.15/9.02	5.12/11.14	6.98/15.17	8.74/19.01	9.63/20.93	12.36/26.88
Heating power input Min./Max.	W	958/2474	1220/3149	1590/4104	1950/5034	2193/5662	2817/7273
C.O.P Min./Max.	W/W	3.65/4.33	3.54/4.2	3.7/4.39	3.78/4.48	3.7/4.39	3.7/4.39
Cooling condition: water inlet/outlet temperature: 23°C /18°C , Ambient temperature: DB35°C /WB24°C ;							
Max. Cooling Capacity	kW	8.6	10.6	14.4	18.1	19.9	25.5
E.E.R	W/W	3.54	3.43	3.59	3.66	3.59	3.59
Cooling Capacity Min./Max.	kW	3.94/8.57	4.87/10.58	6.63/14.41	8.31/18.06	9.15/19.88	11.75/25.54
Cooling Power Input Min./Max.	W	929/2423	1183/3084	1541/4019	1890/4930	2126/5546	2731/7123
E.E.R Min./Max.	W/W	3.54/4.25	3.43/4.12	3.59/4.3	3.66/4.39	3.59/4.3	3.59/4.3
Cooling condition: water inlet/outlet temperature: 12°C /7°C , Ambient temperature: DB35°C /WB24°C ;							
Max. Cooling Capacity	kW	6	7.5	10.2	12.7	14	18
E.E.R	W/W	2.48	2.4	2.51	2.56	2.51	2.51
Cooling Capacity Min./Max.	kW	2.78/6.05	3.43/7.46	4.67/10.16	5.86/12.74	6.45/14.02	8.28/18.01
Cooling Power Input Min./Max.	W	744/2441	948/3108	1235/4049	1515/4967	1704/5587	2189/7176
E.E.R Min./Max.	W/W	2.48/3.74	2.4/3.62	2.51/3.79	2.56/3.87	2.51/3.79	2.51/3.79
Max Power Input	kW	3.09	3.94	5.13	6.29	7.08	9.09
Max Current	A	6.53	8.31	10.83	13.28	14.94	19.18
Sound Pressure (1m)	dB(A)	48	50	53	53	58	/
Sound power Level	dB(A)	62	65	68	68	73	/
Refrigerant	/	R32					
ErP Level(35° C)	/	A+++					
Cabinet Type	/	Galvanized steel painting					
Net Weight	kg	78	88	105	124	124	150
Gross Weight (Cardboard case)	kg	101	105	120	150	150	183
Net Dimension(L×D×H)	mm	1110*475*810	1110*475*810	1110*475*960	1110*475*1355	1110*475*1355	1110*475*1455
Packing Dimension(L×D×H)	mm	1165*490*960	1165*490*960	1165*490*1100	1165*490*1520	1165*490*1520	1165*490*1590

All technical data is compliant with the guidelines specified in the following standards: EN14511; EN14825:2022; EN12102-1:2022; EN14511-3:2022; EN14511-4:2022 Clause4; (EU) NO. 813:2013; OJ 2014/ C207/02:2014. The SCOP seasonal heating efficiency is determined for temperate climate conditions. The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.

For updated product information, please visit <https://sprsunheatpump.com/>.



Specifications


SPRSUN CGK015V3L-B

R32 Refrigerant/Lower Noise/ErP A+++




Power Supply	V/Hz/Ph	220-240/50/1
Sound Pressure (1m)	dB(A)	48
Refrigerant	/	R32
ErP Level(35° C)	/	A+++
Cabinet Type	/	Galvanized steel painting
Net Weight	kg	59
Net Dimension(L*D*H)	mm	1110×475×810

CGK015V3L-B Heating capacity

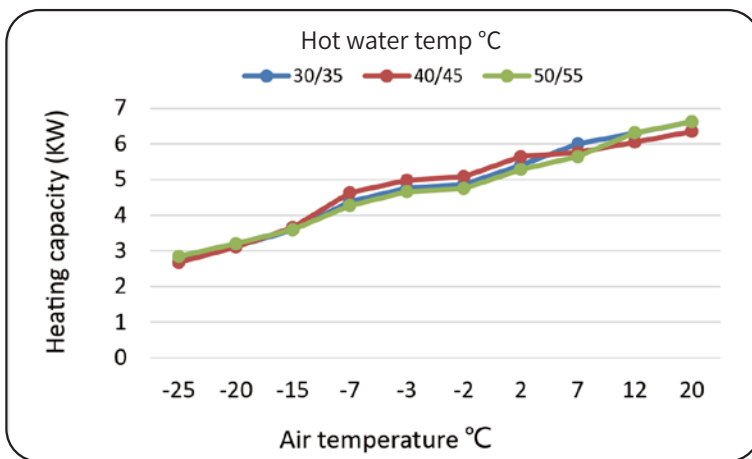

Air temp °C	Heating capacity (kW)		
-25	2.71	2.67	2.84
-20	3.12	3.11	3.21
-15	3.59	3.66	3.59
-7	4.37	4.63	4.27
-3	4.76	4.98	4.66
-2	4.86	5.08	4.75
2	5.40	5.64	5.28
7	6.00	5.76	5.64
12	6.30	6.05	6.31
20	6.62	6.35	6.62
Hot water temp °C	30/35	35/40	40/45

CGK015V3L-B COP

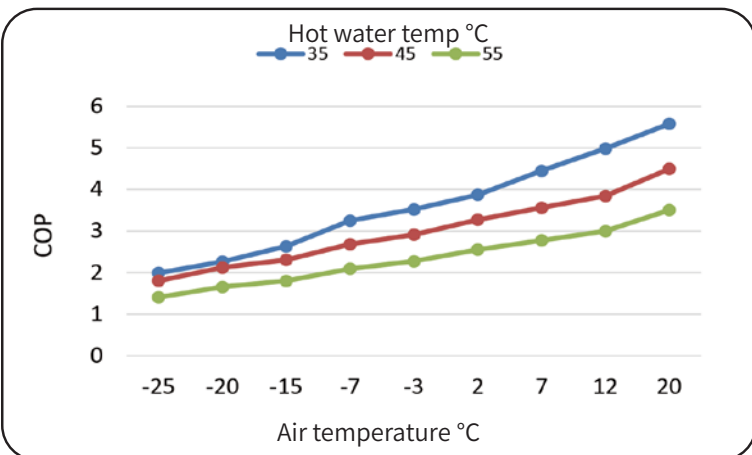

Air temp °C	COP (kW/kW)		
-25	1.99	1.81	1.41
-20	2.27	2.12	1.66
-15	2.63	2.31	1.80
-7	3.25	2.69	2.09
-3	3.52	2.91	2.27
2	3.87	3.28	2.55
7	4.45	3.56	2.78
12	4.98	3.84	3.00
20	5.58	4.50	3.51
Hot water temp °C	30/35	35/40	40/45

* The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.



Specifications




SPRSUN CGK025V3L-B/CGK-025V3L-B

R32 Refrigerant/Lower Noise/ErP A+++


Power Supply	V/Hz/Ph	220-240/50/1, 380-420/50/3
Sound Pressure (1m)	dB(A)	48
Refrigerant	/	R32
ErP Level(35° C)	/	A+++
Cabinet Type	/	Galvanized steel painting
Net Weight	kg	78
Net Dimension(L*D*H)	mm	1110×475×810

CGK025V3L-B/CGK-025V3L-B Heating capacity

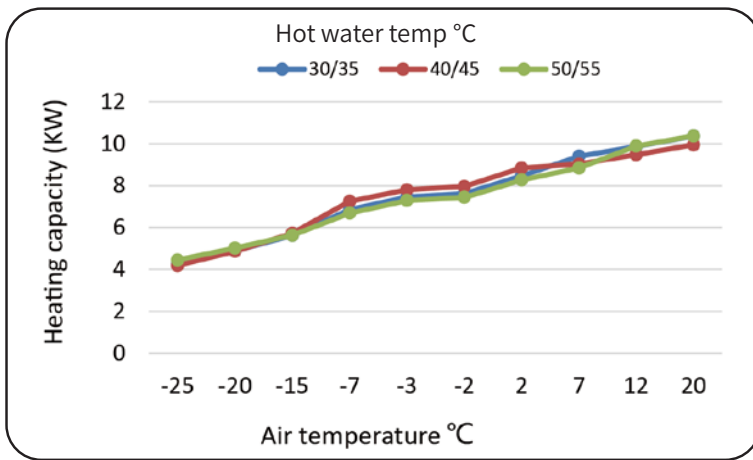

Air temp °C	Heating capacity (kW)		
-25	4.25	4.19	4.46
-20	4.89	4.87	5.02
-15	5.62	5.73	5.63
-7	6.85	7.25	6.69
-3	7.46	7.80	7.29
-2	7.61	7.96	7.44
2	8.46	8.84	8.27
7	9.40	9.02	8.84
12	9.87	9.48	9.89
20	10.36	9.95	10.37
Hot water temp °C	30/35	35/40	40/45

CGK025V3L-B/CGK-025V3L-B COP

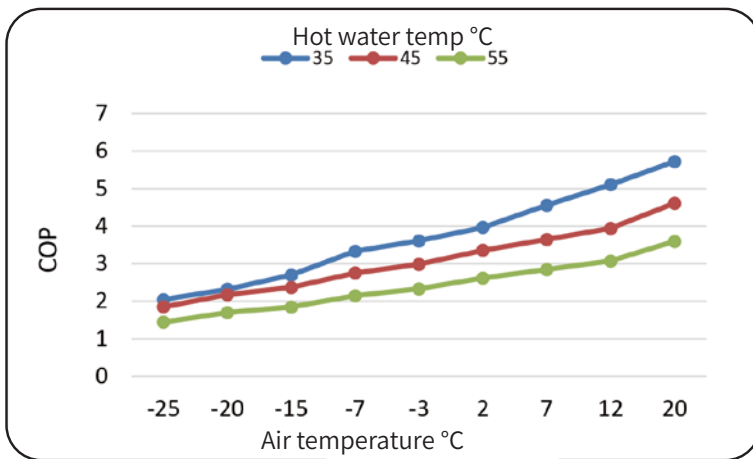

Air temp °C	COP (kW/kW)		
-25	2.04	1.85	1.44
-20	2.32	2.18	1.70
-15	2.70	2.37	1.85
-7	3.33	2.75	2.15
-3	3.61	2.99	2.33
2	3.97	3.36	2.62
7	4.56	3.65	2.85
12	5.11	3.94	3.07
20	5.72	4.61	3.60
Hot water temp °C	30/35	35/40	40/45

* The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.



Specifications




SPRSUN CGK030V3L-B/CGK-030V3L-B

R32 Refrigerant/Lower Noise/ErP A+++


Power Supply	V/Hz/Ph	220-240/50/1, 380-420/50/3
Sound Pressure (1m)	dB(A)	51
Refrigerant	/	R32
ErP Level(35° C)	/	A+++
Cabinet Type	/	Galvanized steel painting
Net Weight	kg	88
Net Dimension(L*D*H)	mm	1110×475×810

CGK030V3L-B/CGK-030V3L-B Heating capacity

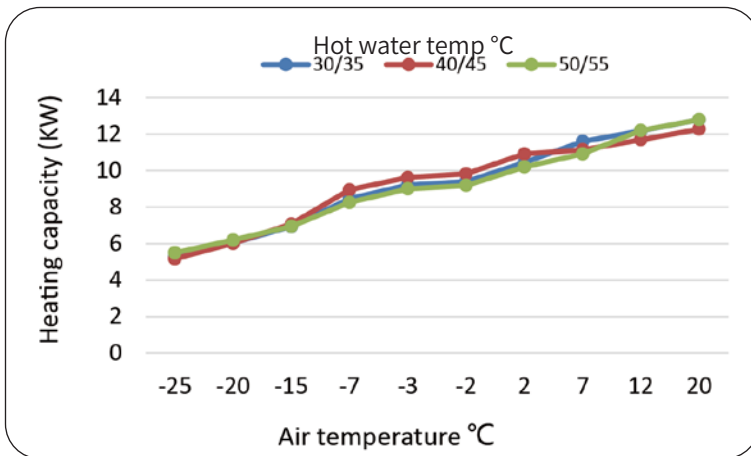

Air temp °C	Heating capacity (kW)		
-25	5.25	5.17	5.50
-20	6.03	6.01	6.20
-15	6.93	7.07	6.94
-7	8.46	8.95	8.25
-3	9.21	9.63	9.00
-2	9.40	9.82	9.18
2	10.44	10.91	10.20
7	11.60	11.14	10.91
12	12.18	11.69	12.20
20	12.79	12.28	12.80
Hot water temp °C	30/35	35/40	40/45

CGK030V3L-B/CGK-030V3L-B COP

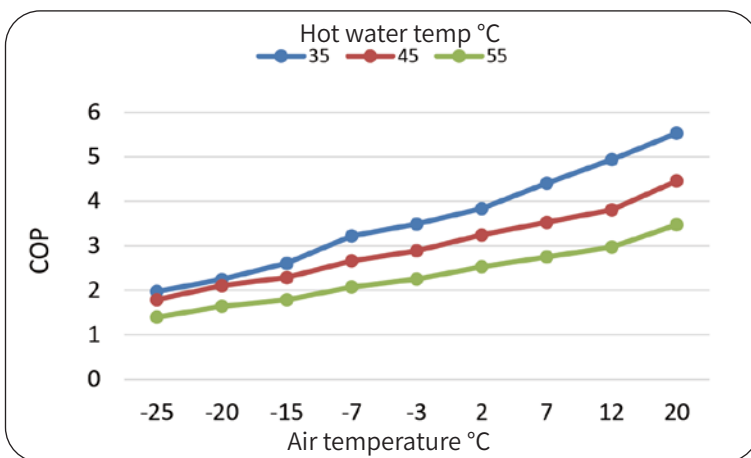

Air temp °C	COP (kW/kW)		
-25	1.98	1.79	1.40
-20	2.25	2.11	1.64
-15	2.61	2.29	1.79
-7	3.22	2.66	2.08
-3	3.49	2.89	2.25
2	3.84	3.25	2.53
7	4.41	3.53	2.75
12	4.94	3.81	2.97
20	5.53	4.46	3.48
Hot water temp °C	30/35	35/40	40/45

* The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.



Specifications




SPRSUN CGK040V3L-B/CGK-040V3L-B

R32 Refrigerant/Lower Noise/ErP A+++


Power Supply	V/Hz/Ph	220-240/50/1, 380-420/50/3
Sound Pressure (1m)	dB(A)	53
Refrigerant	/	R32
ErP Level(35° C)	/	A+++
Cabinet Type	/	Galvanized steel painting
Net Weight	kg	88
Net Dimension(L*D*H)	mm	1110×475×960

CGK040V3L-B/CGK-040V3L-B Heating capacity

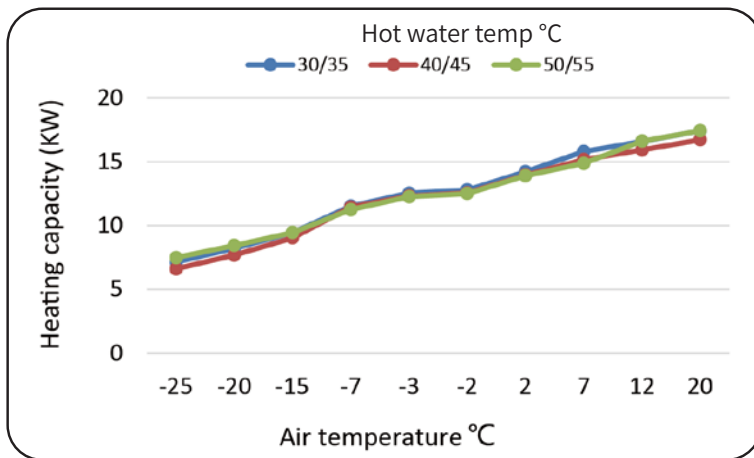

Air temp °C	Heating capacity (kW)		
-25	7.15	6.61	7.49
-20	8.22	7.68	8.44
-15	9.44	9.04	9.46
-7	11.52	11.44	11.24
-3	12.54	12.31	12.26
-2	12.80	12.56	12.51
2	14.22	13.95	13.90
7	15.80	15.17	14.86
12	16.59	15.93	16.62
20	17.42	16.72	17.43
Hot water temp °C	30/35	35/40	40/45

CGK040V3L-B/CGK-040V3L-B COP

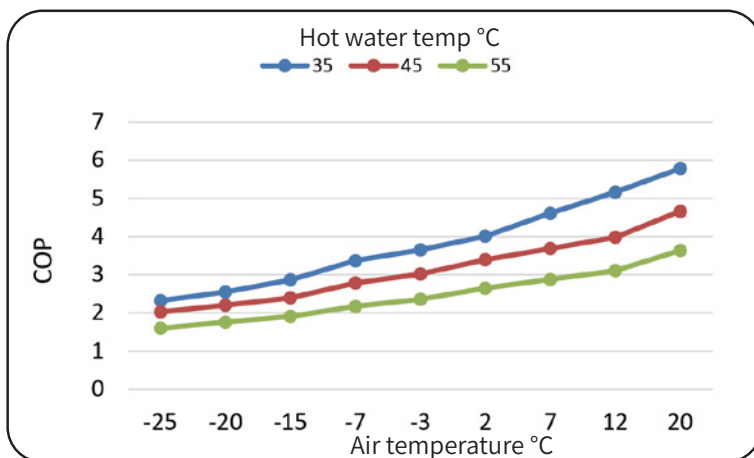

Air temp °C	COP (kW/kW)		
-25	2.32	2.03	1.60
-20	2.55	2.20	1.76
-15	2.86	2.39	1.91
-7	3.37	2.78	2.17
-3	3.65	3.02	2.36
2	4.01	3.39	2.65
7	4.61	3.69	2.88
12	5.16	3.98	3.11
20	5.78	4.66	3.63
Hot water temp °C	30/35	35/40	40/45

* The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.



Specifications




SPRSUN CGK050V3L-B/CGK-050V3L-B

R32 Refrigerant/Lower Noise/ErP A+++


Power Supply	V/Hz/Ph	220-240/50/1, 380-420/50/3
Sound Pressure (1m)	dB(A)	54
Refrigerant	/	R32
ErP Level(35° C)	/	A+++
Cabinet Type	/	Galvanized steel painting
Net Weight	kg	88
Net Dimension(L*D*H)	mm	1110×475×1355

CGK050V3L-B/CGK-050V3L-B Heating capacity

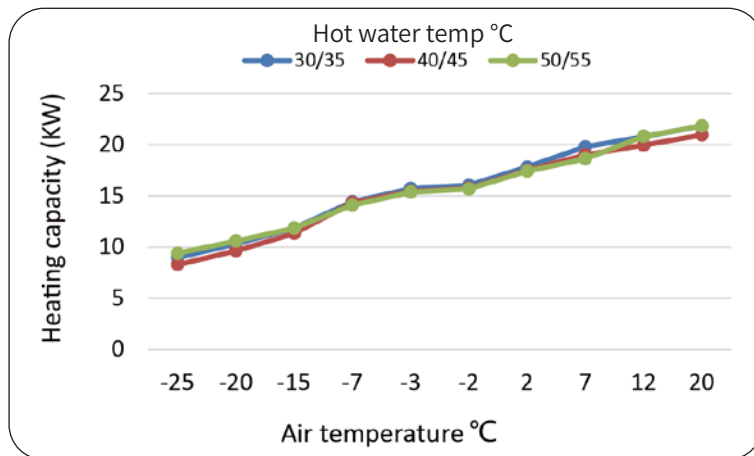

Air temp °C	Heating capacity (kW)		
-25	8.96	8.28	9.39
-20	10.30	9.63	10.58
-15	11.84	11.33	11.85
-7	14.43	14.34	14.09
-3	15.72	15.42	15.36
-2	16.04	15.74	15.68
2	17.82	17.49	17.42
7	19.80	19.01	18.63
12	20.79	19.96	20.83
20	21.83	20.96	21.85
Hot water temp °C	30/35	35/40	40/45

CGK050V3L-B/CGK-050V3L-B COP

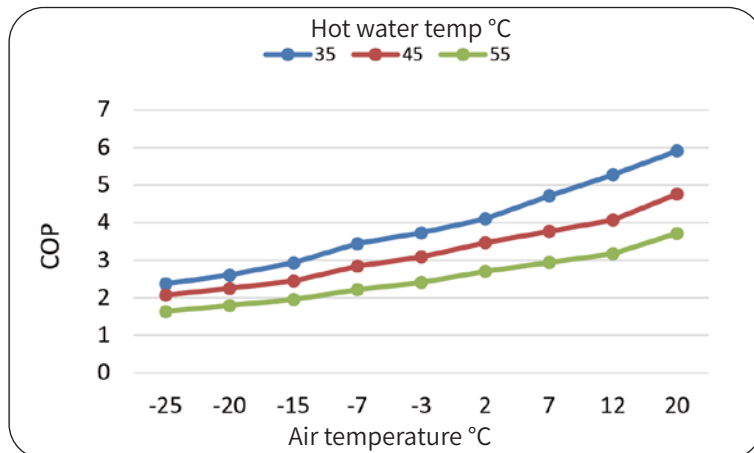

Air temp °C	COP (kW/kW)		
-25	2.37	2.07	1.63
-20	2.60	2.25	1.80
-15	2.93	2.44	1.95
-7	3.44	2.84	2.22
-3	3.73	3.09	2.41
2	4.10	3.47	2.70
7	4.71	3.77	2.94
12	5.28	4.07	3.17
20	5.91	4.76	3.71
Hot water temp °C	30/35	35/40	40/45

* The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.



Specifications




SPRSUN CGK060V3L-B/CGK-060V3L-B

R32 Refrigerant/Lower Noise/ErP A+++


Power Supply	V/Hz/Ph	220-240/50/1, 380-420/50/3
Sound Pressure (1m)	dB(A)	56
Refrigerant	/	R32
ErP Level(35°C)	/	A+++
Cabinet Type	/	Galvanized steel painting
Net Weight	kg	124
Net Dimension(L*D*H)	mm	1110×475×1355

CGK060V3L-B/CGK-060V3L-B Heating capacity

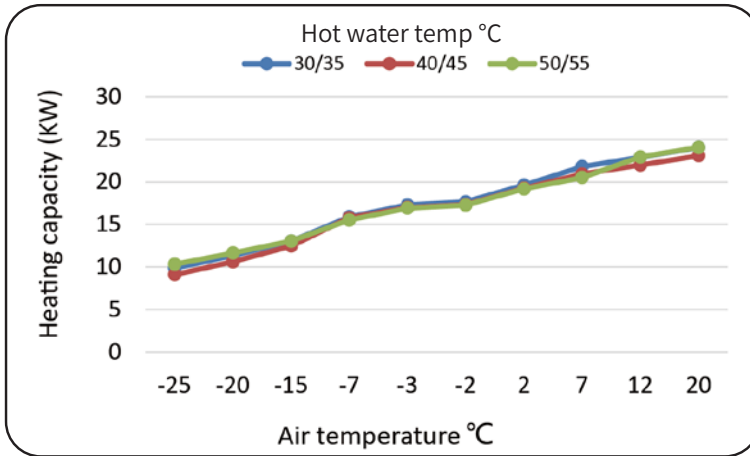

Air temp °C	Heating capacity (kW)		
-25	9.86	9.12	10.33
-20	11.34	10.60	11.65
-15	13.03	12.47	13.05
-7	15.89	15.79	15.51
-3	17.30	16.98	16.91
-2	17.66	17.33	17.26
2	19.62	19.25	19.18
7	21.80	20.93	20.51
12	22.89	21.97	22.93
20	24.03	23.07	24.05
Hot water temp °C	30/35	35/40	40/45

CGK060V3L-B/CGK-060V3L-B COP

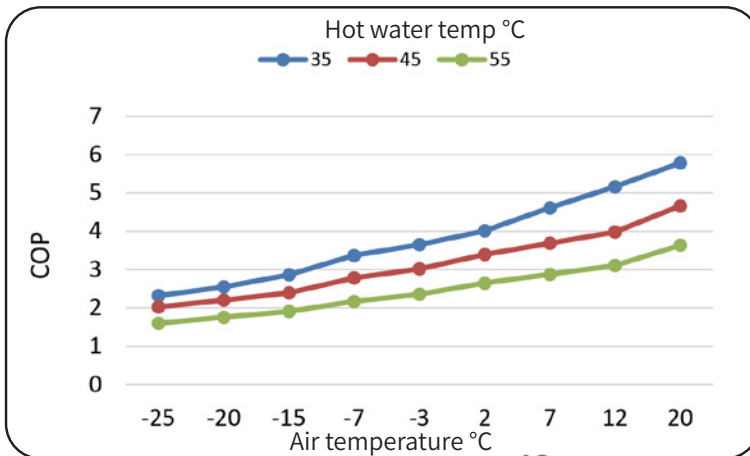

Air temp °C	COP (kW/kW)		
-25	2.32	2.03	1.60
-20	2.55	2.20	1.76
-15	2.86	2.39	1.91
-7	3.37	2.78	2.17
-3	3.65	3.02	2.36
2	4.01	3.39	2.65
7	4.61	3.69	2.88
12	5.16	3.98	3.11
20	5.78	4.66	3.63
Hot water temp °C	30/35	35/40	40/45

* The information in this document is just for reference. Since the continuous improvement and control in the production process, the information contained in this document may be subject to change. Please refer to the nameplate on the machine for model specifications.

